


5

4

3

2

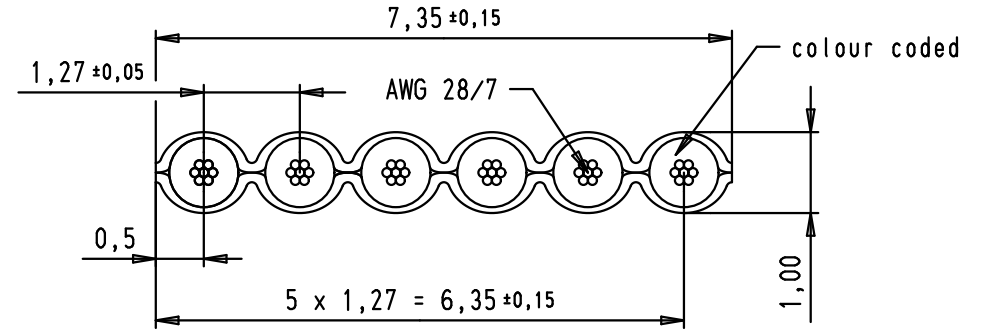

1



Wire	Cu tinned
Gauge	AWG 28/7
Voltage rating	300 Vr.m.s
Current (Max)	2,1A at 25°C
Conductor resistance	221 mΩ/m
Capacity unbalanced	42,7 pF/m
Impedance unbalanced	105 Ω
Inductance unbalanced	0,68 μH/m
Signal delay	4,9 ns/m
Insulation material	PVC
Temperature rating	-20°C (operating) to 105°C -30°C (static)
Flammability rating	UL: VW1
Insulation resistance	100 MΩ/km
Approval	UL AWM style 2651

Colour code sequence (in 10 steps)

- brown
- red
- orange
- yellow
- green
- blue
- violet
- grey
- white
- black

			Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 rainbow flat cable 6 poles, length per reel: 30,48m IEC 918	Maßstab/ Scale 10:1
		Detail.	19/02/10	SC			
		Insp.					
		Stand.					
EC01446	22/02/10	SC	HARTING EURL F-95972 Paris			TB 09 18 006 7005	Blatt/ Page 1 / 1
Mod.	Dot.	Name					