


# LED SL 840 S-PUd-M8D-65

**SANGEL**<sup>®</sup>  
Systemtechnik

Art. Nr. 1-000000-06903

Ktl. Nr. 15070880

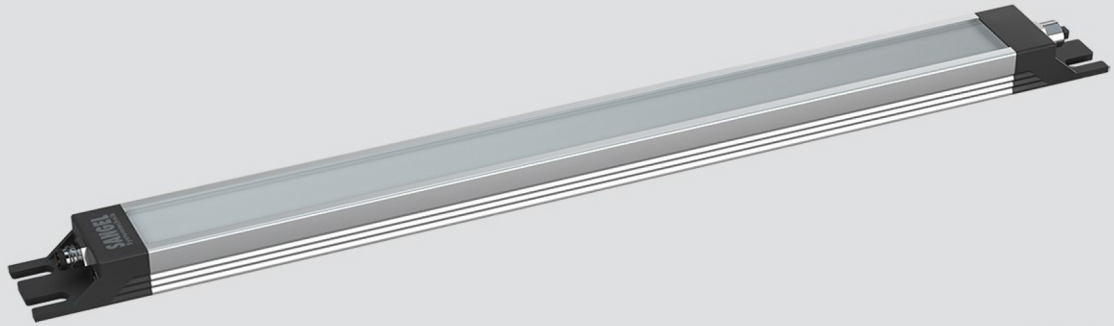

Lichtfarbe / Light Colour	6500 K
Schutzart / Internal Protection	IP69K
Netzanschluss / Main Supply	24 V DC
Dimmbar / Dimmable	nein
Bestückt / Fitted With	LED
Schutzklasse / Protection Class	3
Leistung / Power	21,9 W
Lichstrom / Luminous Flux	3618 lm
Farbtreue / Colour Rendering	RA / CRI ≥80
Betriebstemperatur / Operating Temp.	-20°C / 45°C
Lebensdauer / Lifetime	min. 60000 h
Optik / Optics	100°
Maße / Dimensions	a= 904, b= 914mm
Anschluss / Connection Type	M8, 4-pol, a-codiert
Kaskadierbar / Cascadable	ja
Gehäuse / Housing	Aluminium
Gewicht(Netto) / Weight(Net)	1,2 kg
Abdeckung / Cover	PU
Befestigung / Fastening	starr
Zubehör / Equipment	-

