


LED Work Light

CWK

CE	RoHS 10	UL	FCC	IP66G	IP67G	Indoor Use
Mounting in All Directions	Ambient Temperature -10°C~+50°C	Daylight				

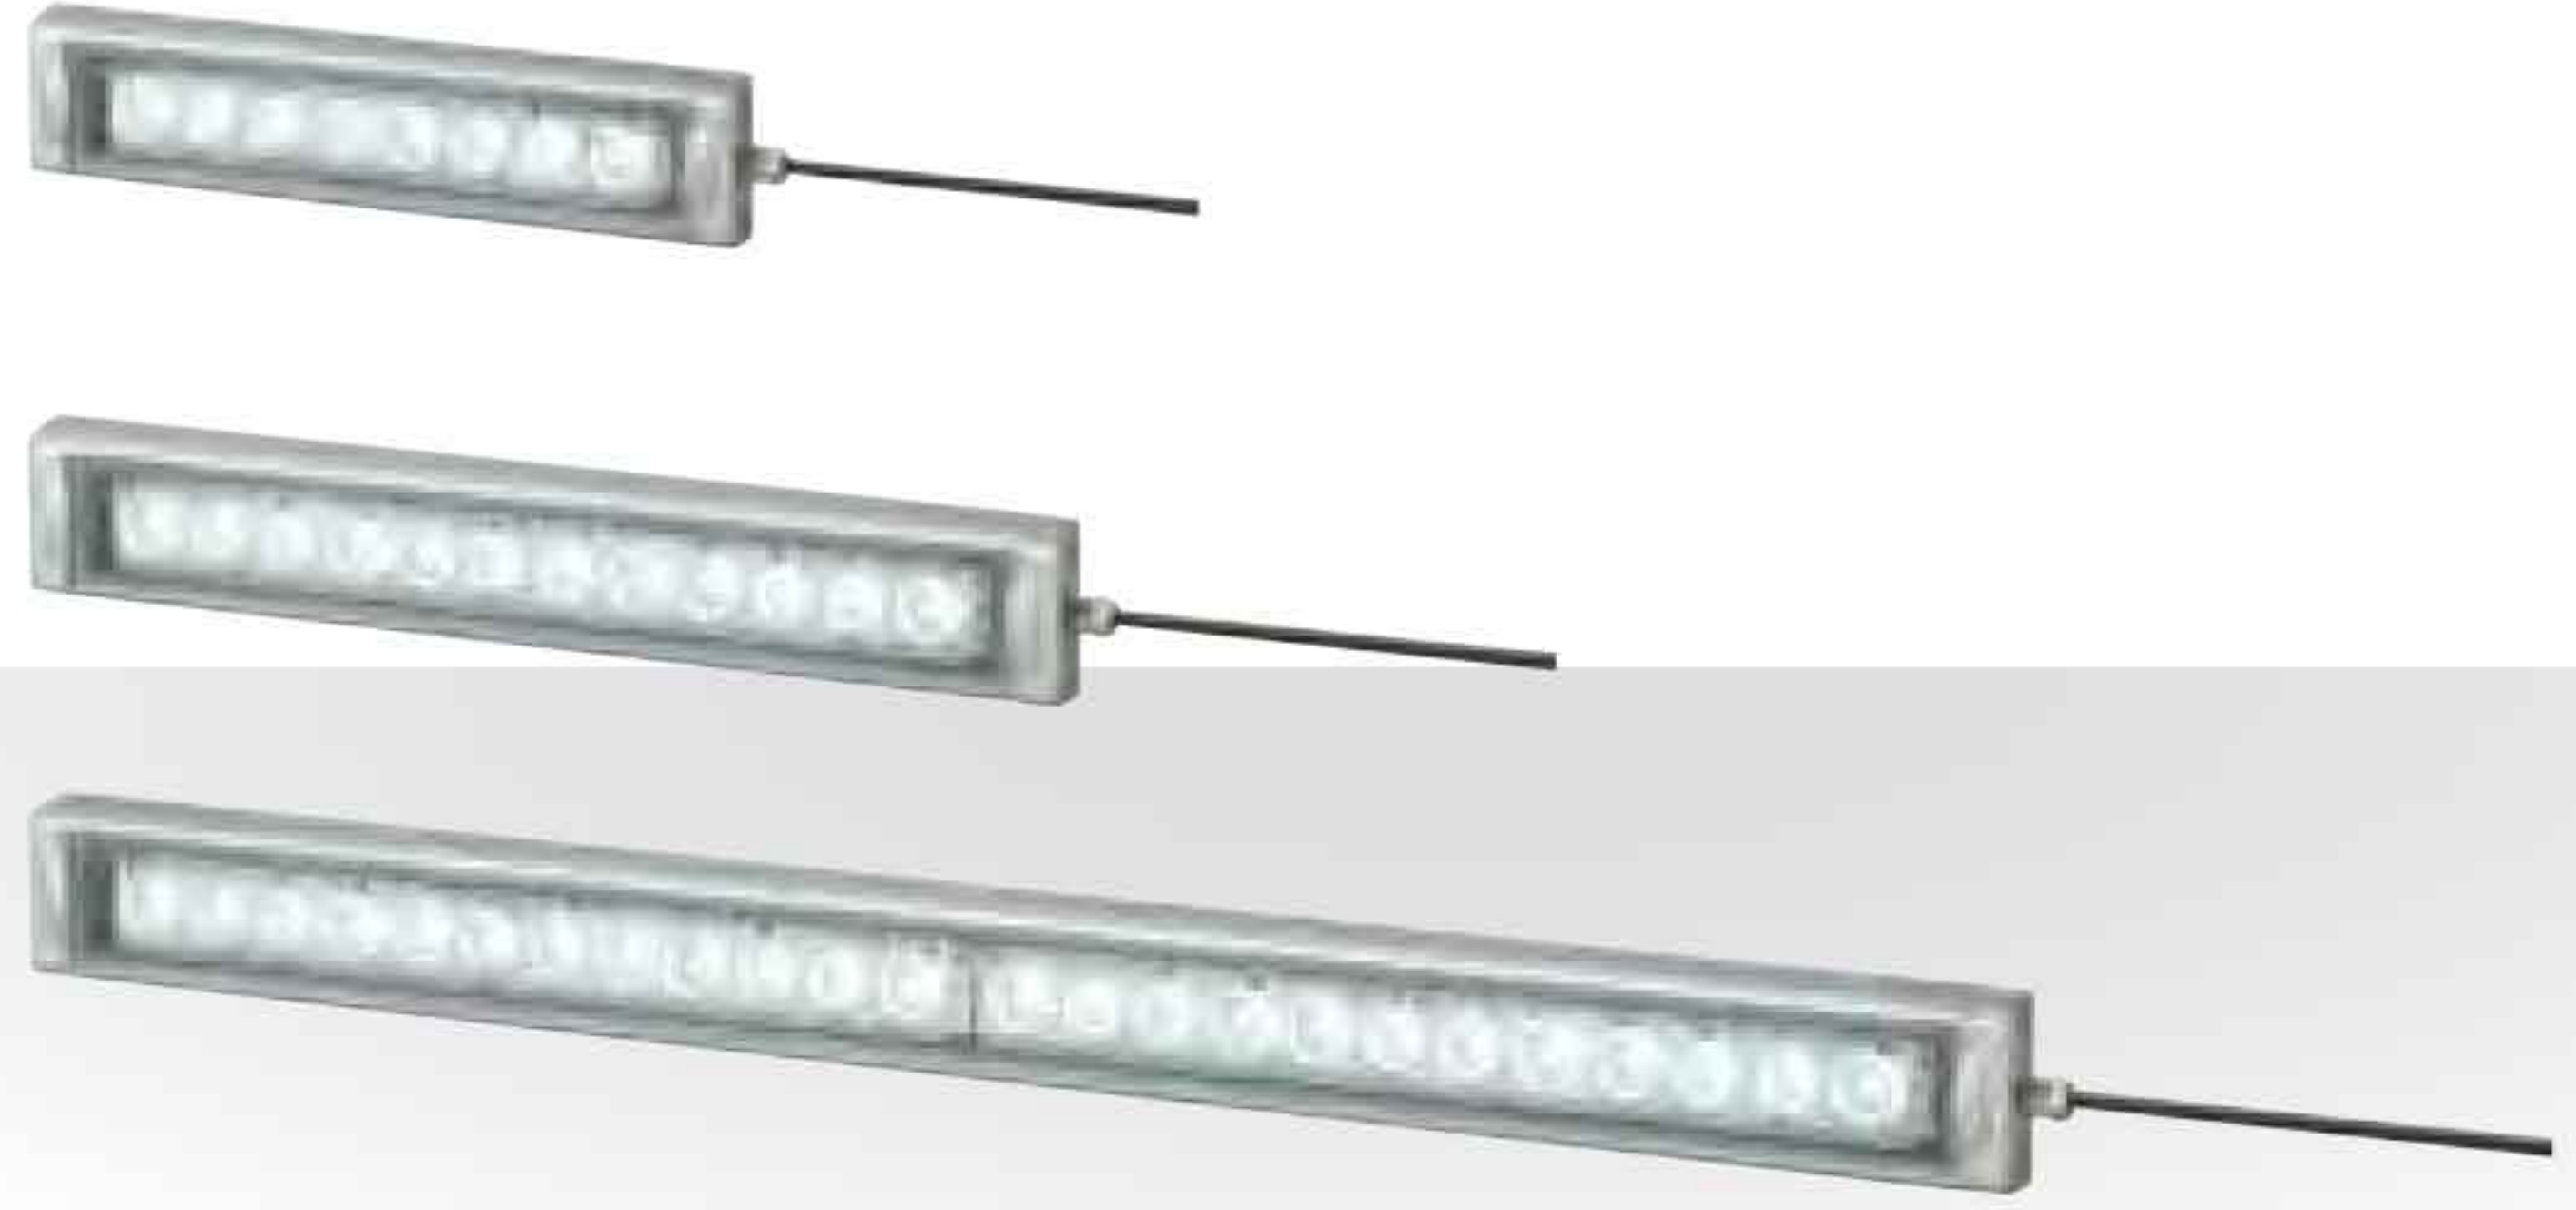

LAN/USB / PoE / Wireless

Signal Tower

Beacons

Cube Tower

Audible Alarms and MP3 Voice Annunciators

Hybrid Signaling Devices

LED Illumination

Optional Parts


Model Number Configuration

CWK2S-24-CD

① ② ③ ④

① Length 2 = 200mm 3 = 300mm 6 = 600mm	② Connector Type S = Side-exiting Cable	④ Luminous Color CD = Daylight
③ Rated Voltage 24 = 24V DC		

Dimensions (mm)

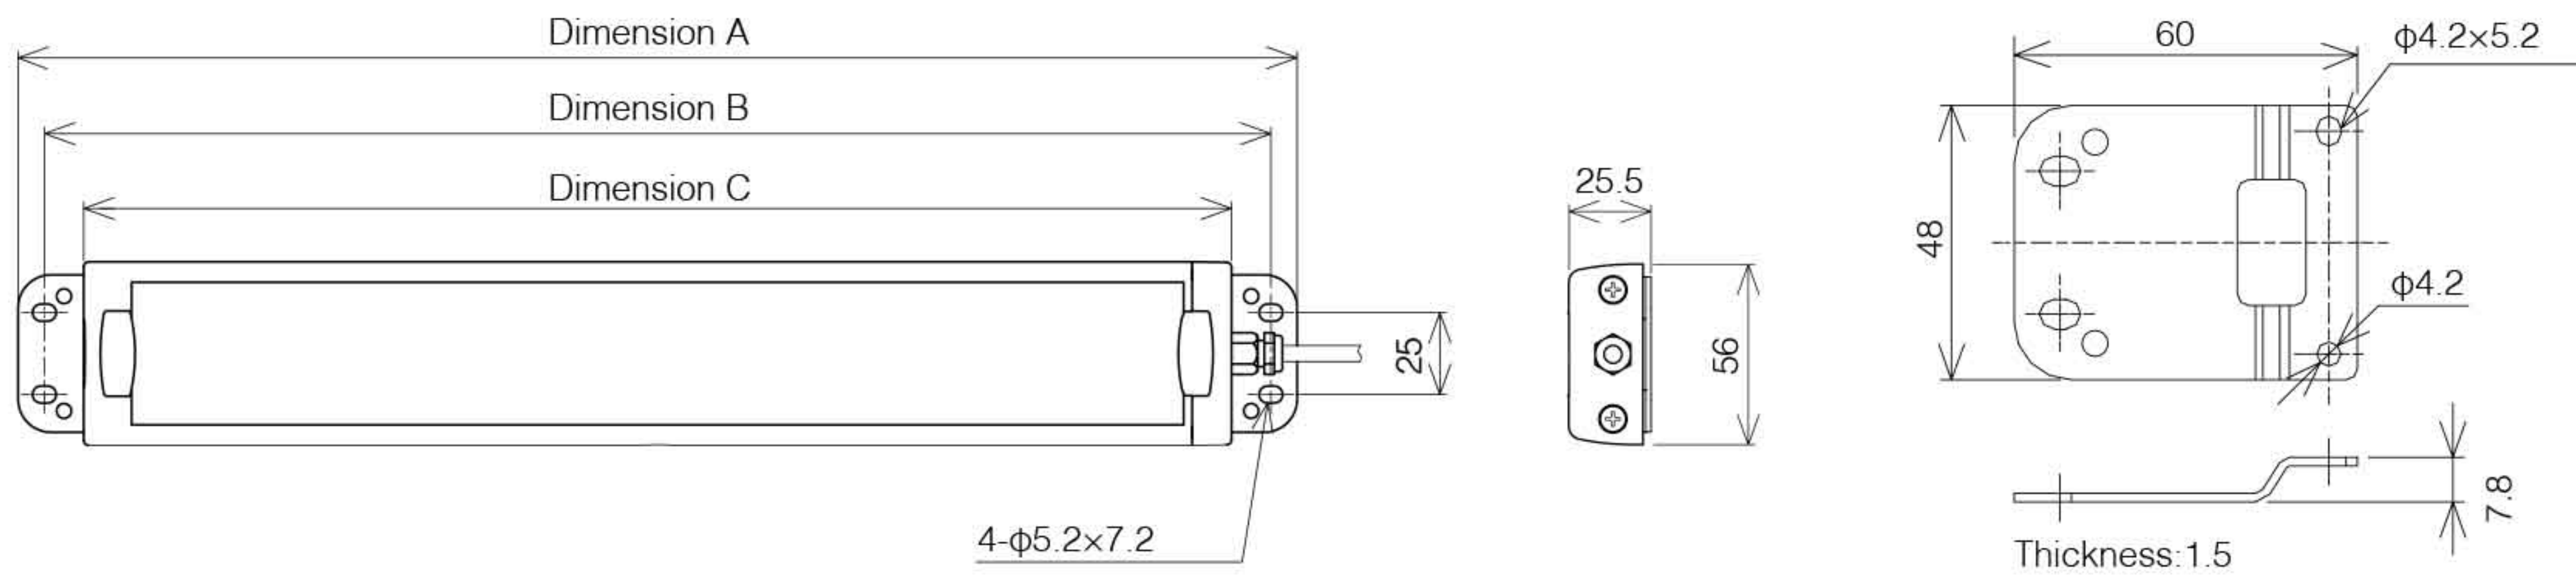

Model Number	Dimension A	Dimension B	Dimension C
	Overall Length	Mounting Pitch	Body Length
CWK-2S-24-CD	290mm	274mm	250mm
CWK-3S-24-CD	390mm	374mm	350mm
CWK-6S-24-CD	690mm	674mm	650mm

Optional Parts

For details refer to P. 93 to P. 98

Product Description	Model Number
Swivel Bracket	SZ-320KS (1 pair)

Specification

Description	200mm	300mm	600mm
Illuminance (@1m, center, typical)	600lx	850lx	1500lx

Product List

Model Number	Rated Voltage	Luminous Color	Power Consumption	Mass
CWK2S-24-CD	24V DC	Daylight	8.64W	0.6kg
CWK3S-24-CD	24V DC	Daylight	11.52W	0.75kg
CWK6S-24-CD	24V DC	Daylight	23.04W	1.23kg