

5



4

3



2

1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

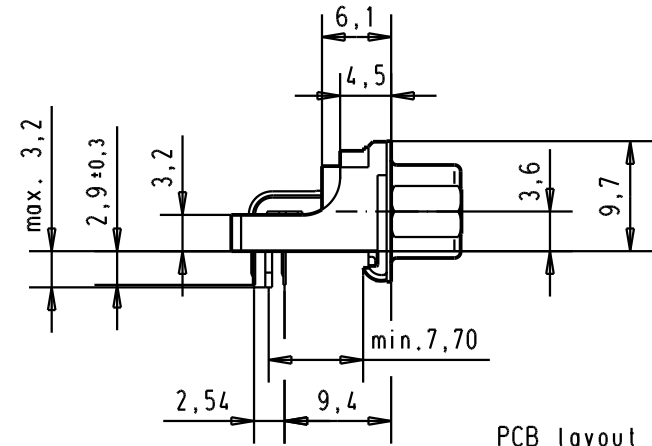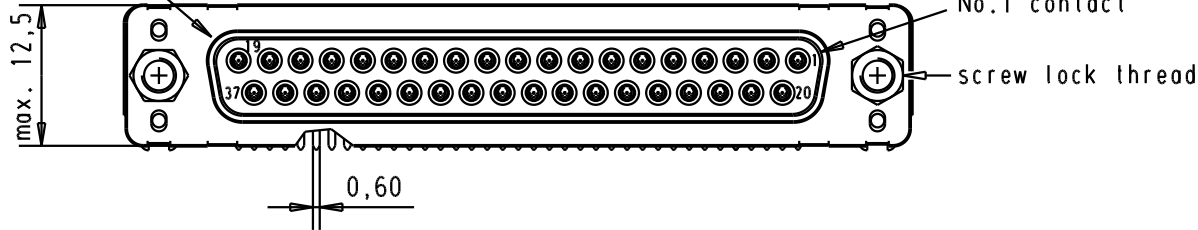

PCB layout hole component side

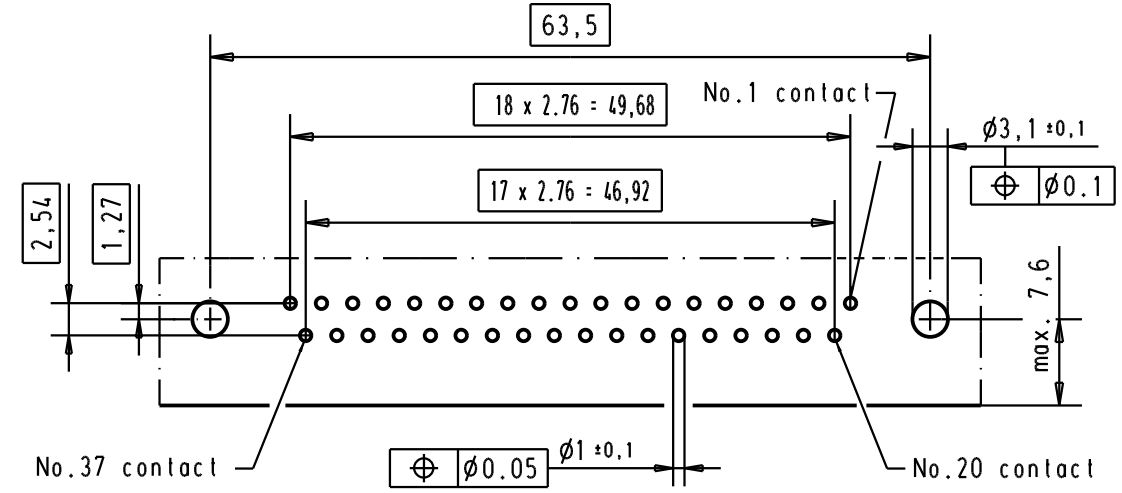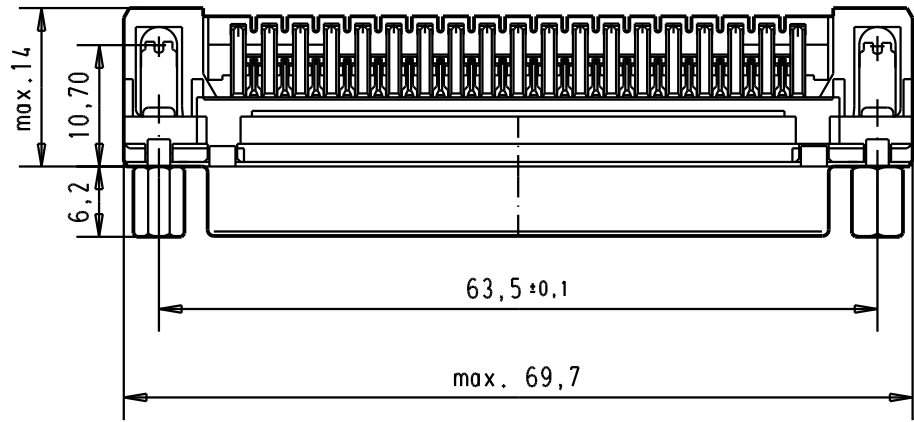

Connector retention and insertion forces on the PCB = 25 / 80 newtons

			Mod.	Dat.	Name	Dol.		Name	Moßstab/ Scale	
			31892	05/05/04	JH	Detail.	02/sept/00	jfb	1.5:1	
			31084	04/SEP/02	YT	Insp.				
09 66 452 3617	4-40 UNC	1	27961	24/nov/00	jfb	Stand.				
09 66 452 6617	4-40 UNC	2	27952	26/oct/00	jfb	HARTING EUROL F-95972 Paris				
09 66 452 7617	4-40 UNC	3	27948	02/sept/00	jfb					
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name			 TB 0966452x61x		Blatt/ Page 3
								Sub.		



D-Sub 37 poles low profil angle female, solder pin with screw lock and grounding board lock.

All Dim. in mm
Orig. Size DIN A 4

Moßstab/
Scale
1.5:1
Blatt/ Page
3