

# ARCA 304015



Sample image

**Order symbol :** ARCA 304015

**Product nr :** 8120022

**Description :** Cabinet, PC


**Remarks :** Grey cover, 2-point locking, hinges on the short side

**EAN :** 6418074079336

**El. number :**

- Finland : 3423119
- Denmark : 8212091207
- Sweden : 2500111

**Including :** Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

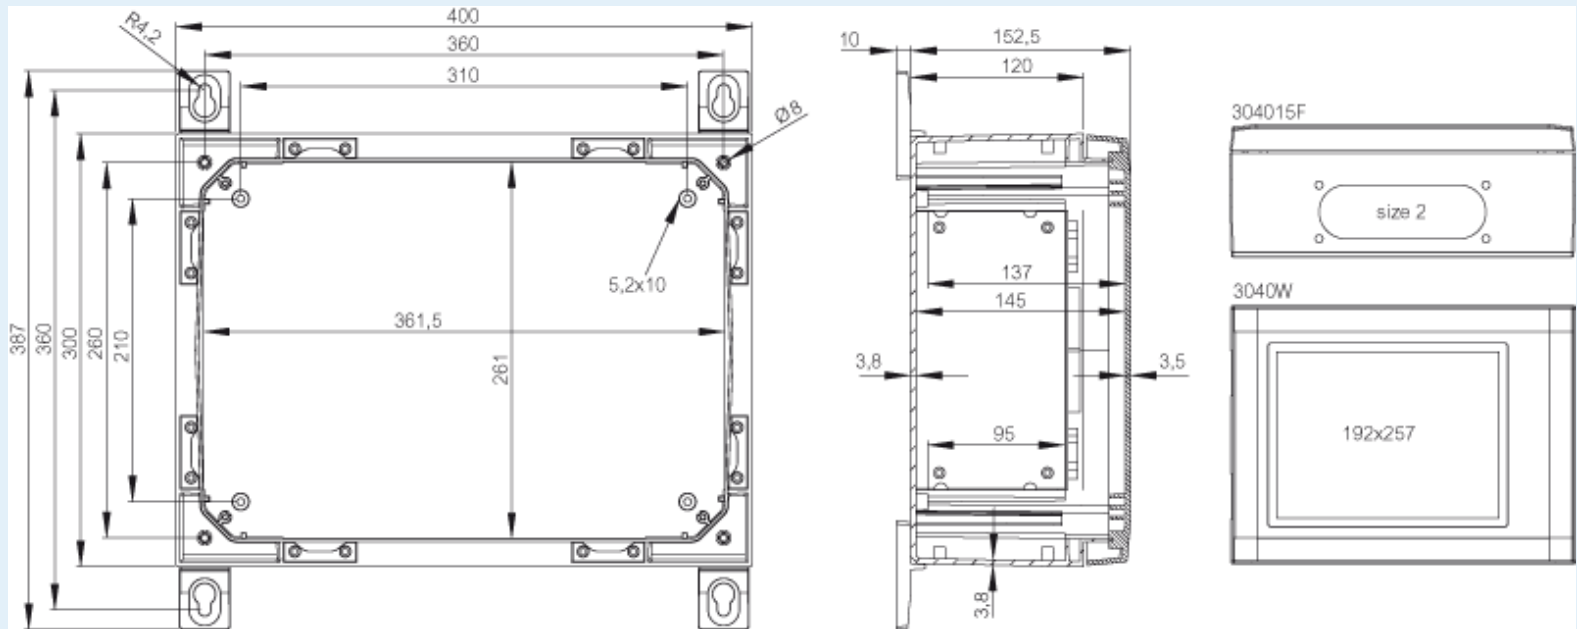

Dimensions :	Height	Width	Depth
mm :	300	400	150
inch :	11.81	15.75	5.91

**Materials :**

Material :	Polycarbonate
Base colour :	RAL_7035

**Accessories :**

DRS ARCA 304015	DIN rail frame set (385 x 285 x 35)
DSP ARCA HRS	Door stopper ARCA, horizontal, right, small (15 x 104 x 16)
DSP ARCA HLS	Door stopper ARCA, horizontal, left, small (15 x 104 x 16)
IDS ARCA 3040	Inner door set
RCS ARCA	Rain canopy set for size 3040

Cover colour : RAL 7035 -light grey

Gasket material : Polyurethane

**Temperatures :**

Temperature °C (continuous) : -40 ... 80

Temperature °F (continuous) : -40 ... 175

3040

PMK ARCA 40 PoleMounting kit, for pole  $\varnothing$ 100-300mm  
(385 x 285 x 35)

MPP ARCA 3040 Mounting plate perforated (350x250x2 mm -  
26x11 mm)  
(250 x 350 x 2)

MPMP ARCA 4030 Mounting plate multiperforated (350x250x2  
mm -  $\varnothing$ 3.6 mm)  
(350 x 250 x 1.5)

MPS ARCA 4030 Mounting plate (350x250x2 mm)  
(350 x 250 x 2)

MPX ARCA 4030 Mounting plate (350x250 mm)  
(350 x 250 x 15)

**Ratings :**

Ingress protection (EN 60529): IP66;

Impact Resistance (EN 62262): IK10;

electrical\_insulation : Totally insulated

Halogen free (DIN/VDE 0472, Part 815) : Yes

UV resistance : UL 746C

Flammability Rating : UL 94 5VA

Glow Wire Test (IEC 695-2-1) °C : 960C

UL Type NEMA\_\_1\_4\_4X\_12\_13

**Certificates :**

Certificate FI 40467