

# ARCA 507030

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol :** ARCA 507030

**Product nr :** 8120031

**Description :** Cabinet, PC


**Remarks :** Grey cover, 2-point locking, hinges on the short side

**EAN :** 6418074086006

**El. number :**

- Finland : 3424062
- Denmark : 8212095384
- Sweden : 2500119

**Including :** Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

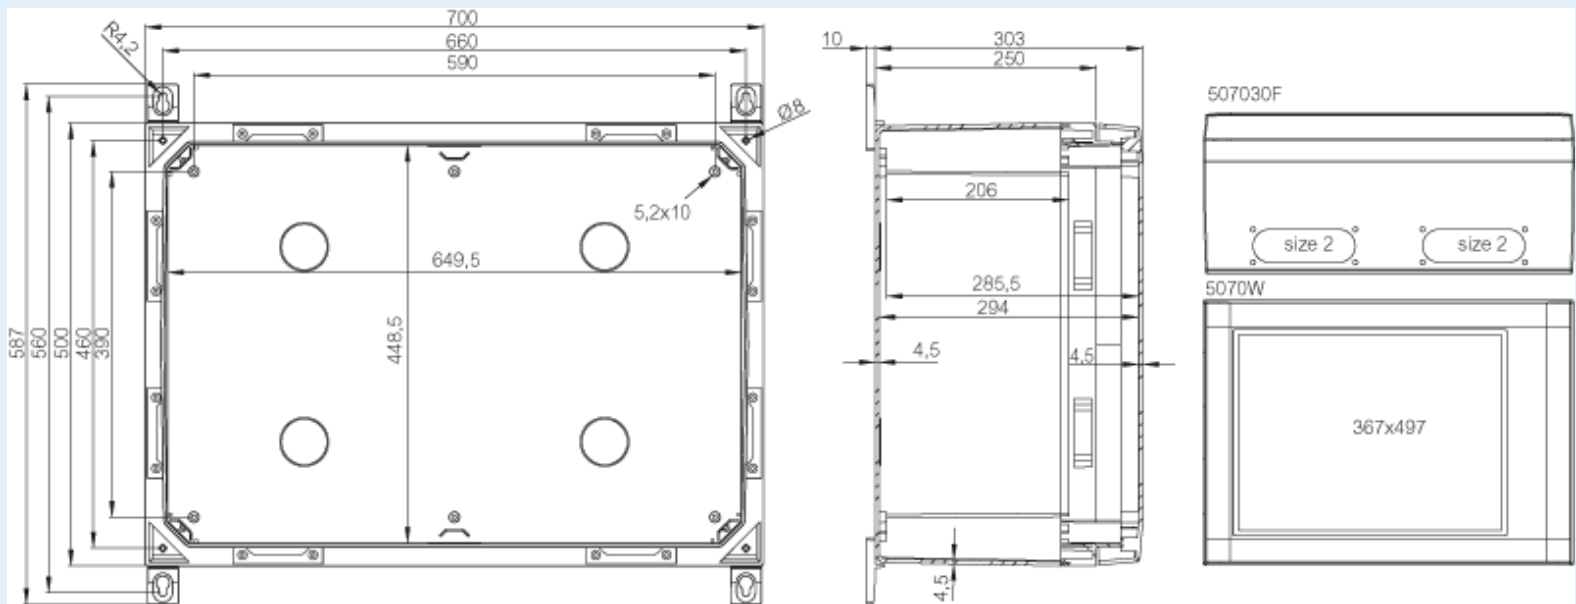

Dimensions :	Height	Width	Depth
mm :	500	700	300
inch :	19.69	27.56	11.81

## Materials :

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey

## Accessories :

MPX ARCA 7050	Mounting plate (630x430 mm) (630 x 430 x 15)
PMK ARCA 70	PoleMounting kit, for pole $\varnothing$ 100-300mm (685 x 485 x 35)
RCS ARCA 5070	Rain canopy set for size 5070 (50 x 700 x 20)
DSP ARCA RM	Door stopper ARCA, right, midsize 5070-8060 (22 x 200 x 16)
DRS ARCA 507030	DIN rail frame set (685 x 485 x 35)

Gasket material : Polyurethane

**Temperatures :**

Temperature °C (short term) : -40 ... 120

Temperature °C (continuous) : -40 ... 80

Temperature °F (short term) : -40 ... 250

Temperature °F (continuous) : -40 ... 175

IDS ARCA 5070 Inner door set

DSP ARCA LM Door stopper ARCA, left, midsize 5070-8060 (22 x 200 x 16)

MPS ARCA 7050 Mounting plate (630x430x2 mm) (630 x 430 x 2)

MPMP ARCA 7050 Mounting plate multiperforated (630x430x2 mm - ø3.6 mm)

MPP ARCA 5070 Mounting plate perforated (630x430x2 mm - 26x11 mm) (430 x 630 x 2)

**Ratings :**

Ingress protection (EN 60529): IP66;

Impact Resistance (EN 62262): IK10;

electrical\_insulation : Totally insulated

Halogen free (DIN/VDE 0472, Part 815) : Yes

UV resistance : UL 746C

Flammability Rating : UL 94 5VA

Glow Wire Test (IEC 695-2-1) °C : 960C

UL Type 1, 4, 4X, 12, 13

**Certificates :**

Certificate FI 40467