

M12-A

Series	763, 765
Contacts	4
Coding	A
Thread	M12 x 1
Rated current	8 A
Rated voltage	250 V
Degree of protection	IP67
Contact plating	Au
Termination	moulded
Cable outlet	PUR
Wire gauge	1,5 mm ²



M12 A-Coded Overmoulded Power Connectors

- For applications with high power output
- 8 A rated current
- 250 V rated voltage
- 1,5 mm² cross section
- Standard cable lengths 2 m and 5 m
- Available from June 2016 on


Description

Drawing

Contacts Cod. Cable length, PUR Ordering-No.


Male cable connector, moulded, PUR (black)

4	A	2 m	77 0605 0000 50704-0200
		5 m	77 0605 0000 50704-0500

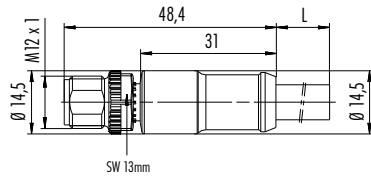

Female cable connector, moulded, PUR (black)

4	A	2 m	77 0606 0000 50704-0200
		5 m	77 0606 0000 50704-0500

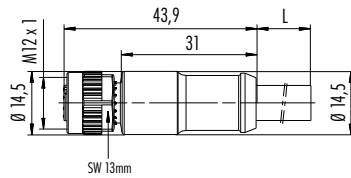

Connecting cable, Male cable connector M12 x 1 – Female cable connector M12 x 1, PUR (black)

4	A	2 m	77 0606 0605 50704-0200
		5 m	77 0606 0605 50704-0500

