



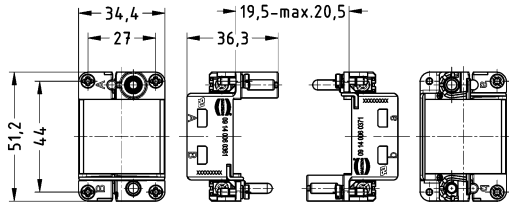


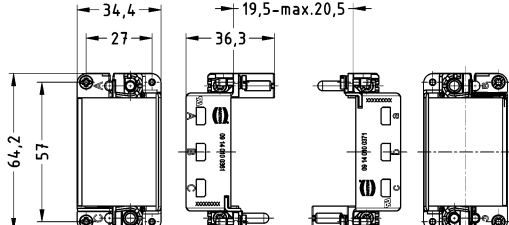

Features

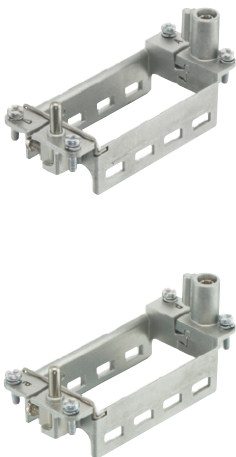
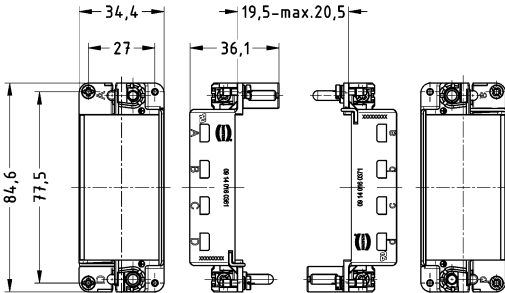
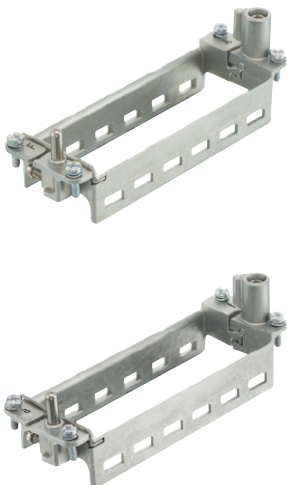
- Suitable for more than 100 different modules
- Easy and quick assembly with an audible „click“
- Very high mechanical stability
- Modules can be removed without tools
- Two leading PE contacts

Technical characteristics

Specifications / approvals	DIN EN 60664-1 DIN EN 61984 
Limiting temperatures	-40 °C ... +125 °C
Mating cycles	≥ 500
Material	
Hinged frames	zinc die-cast alloy
Clamp	stainless steel
PE contact	copper alloy
Conductor cross-section PE (power side)	4 ... 10 mm ² 10 mm ² only with wire ferrule crimping tool 09 99 000 0374
Conductor cross-section PE (control side)	0.5 ... 2.5 mm ²



Identification	Size	Part number Marking	Marking	Drawings	Dimensions in mm
Han-Modular® Hinged frames plus for 2 modules	 6 B	A ... B 09 14 006 0361			
	 6 B	a ... b 09 14 006 0371			
Han-Modular® Hinged frames plus for 3 modules	 10 B	A ... C 09 14 010 0361			
	 10 B	a ... c 09 14 010 0371			

Identification	Size	Marking	Part number Marking	Drawings	Dimensions in mm
<p>Han-Modular® Hinged frames plus for 4 modules</p> 	<p>16 B</p> <p>16 B</p>	<p>A ... D 09 14 016 0361</p>	<p>a ... d 09 14 016 0371</p>		
<p>Han-Modular® Hinged frames plus for 6 modules</p> 	<p>24 B</p> <p>24 B</p>	<p>A ... F 09 14 024 0361</p>	<p>a ... f 09 14 024 0371</p>	