



Contact Socket 1 mm

Hyperboloid

wire spring contact

for: - 623
- 917, 7-pin
- 923, 8- and 9-pin

TE part number: 60-0001-011-000
IC reference number: 60.001.11

Electrical Data

rated current max. 10 A*
contact resistance < 5 mOhm

Material

contact brass, gold plated

Termination



kind of termination crimp
cross-section 0.06 - 1.0 mm² ¹⁾
0.14 - 1.0 mm² ²⁾
- for insulation crimp max. \varnothing 2.1 mm
stripping length 6 mm
crimp settings select individually

Mechanical Data

mating cycles 500

Tools (not part of product contents)

digital crimping tool	TE part no.: C0-0235-000-000 ¹⁾ IC ref. no.: C0.235.00 ¹⁾	C0-0236-000-000 ²⁾ C0.236.00 ²⁾
analog crimping tool	TE part no.: C0-0101-000-000 ¹⁾ IC ref. no.: C0.101.00 ¹⁾	C0-0201-000-000 ²⁾ C0.201.00 ²⁾
positioner	TE part no.: C0-0003-000-000 IC ref. no.: C0.003.00	
power crimping		
crimping machine	TE part no.: WA-1672-000-000 IC ref. no.: WA10672	
digital crimp insert, small	TE part no.: C0-0372-000-000 ¹⁾ IC ref. no.: C0.372.00 ¹⁾	
digital crimp insert, medium	TE part no.: C0-0373-000-000 ²⁾ IC ref. no.: C0.373.00 ²⁾	

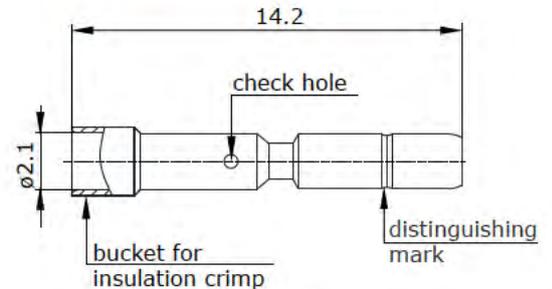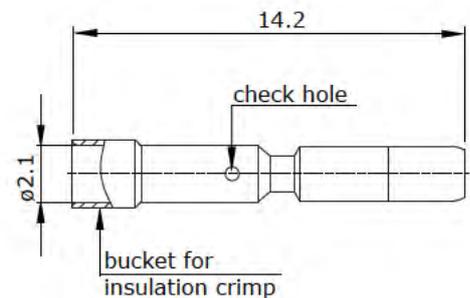

Main Dimensions
contact socket

